

# 4L2-4/LMF0

5 port pilot operated valve

Pneumatic valve

## Overview

4L2-4 series is easy maintenance plug-in method, compact and large flow rate 5 port pilot operated valve. Applicable cylinder bore size up to 80mm.

## Features

### Simple wiring

Wiring connects to terminal only. Even in narrow space, this method enables quick wiring. Relay box is not required. Wiring from same direction is possible.

### Reduced foot print

Compact 25mm wide actuator.

### Easy maintenance


Plug-in type coil and plug-in method between valve and D-sub-base enable easy maintenance.

### Minimum air leakage

Simple soft packing seal is used. Air leakage is just 10cm<sup>3</sup>/min (ANR) or less. Drastic reduction is realized comparing to metal seal. This saves waste of compressed air and enables reliable cylinder drive.

### Simple plumbing

No valve projection from manifold base enables smooth joint installation.

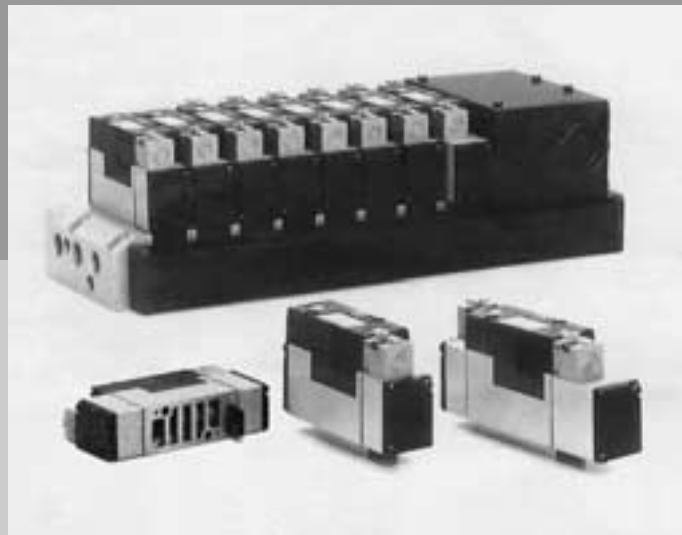

## CONTENTS

Variation of electric connection (circuit diagram)	468
⚠ Precautions	469
<b>Discrete valve</b>	
• 4L2-4	<b>470</b>
<b>Reduced wiring manifold</b>	
• LMF0	<b>470</b>
Technical data	476

4SA/B0

4SA/B1

4GA/B

MN4GA/B

4GA/B  
(master)

MN3S0/  
MN4S0

4TB

**4L2-4/  
LMF0**

4KA/B

4F

PV5/  
CMF

3MA/B0

3PA/B

P/M/B

NP/NAP/  
NVP

4F\*\*0E

HMV/  
HSV

Uniwire  
system

SKH

PCD/  
FS/FD

5 port pilot operated valve