

4TB

Reduced wiring valve

4, 5 port pilot operated valve

Overview

4TB series is PLC compatible reduced wiring 4, 5 port valve whose plug-in coils are integrated to one side. Applicable cylinder bore size is 20 to 180mm, and wide variations.

Features

Wide option variation

1Various spacers, protection structure IP65 (4TB3/4) etc. are available.

Light weight, small size

Heat proof resin, push in joint, DIN rail method (4TB1/2) etc. are available

Flexible increase/reduction of station No.

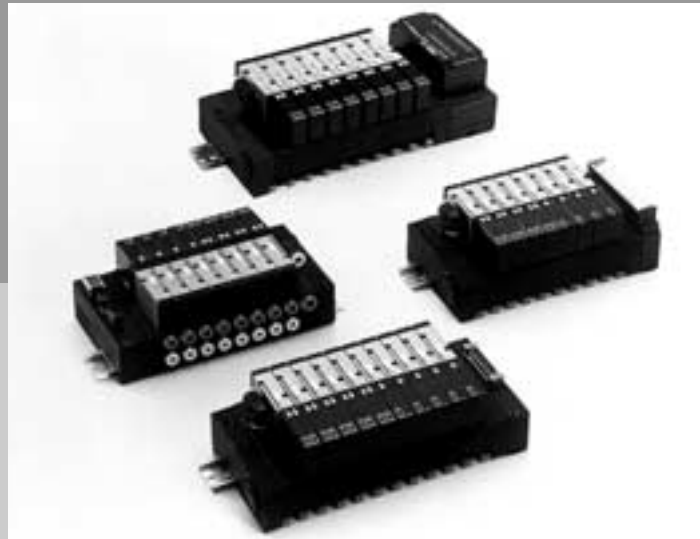
Block manifold method is used.

PLC control



Wide wiring variations such as serial transmission and common gland etc. are available. These are compatible with UNIWIRE SYSTEM and other network systems.

Easy plumbing and maintenance

Plug-in block manifold remarkably reduced dead space.
Flat and simple design.



CONTENTS

Series variation	402
Variation of electric connection (method/circuit diagram)	404
 Precautions	405
Discrete	
• 5 port valve (4TB3/4)	406
Reduced wiring block manifold	
• 4 port valve (MN4TB1/2)	412
Reduced wiring manifold	
• 5 port valve (M4TB3/4)	422
Block part system	434
Technical data	444
Block manifold specifications/wiring specifications	456
 Electric catalog file list	465

4SA/B0

4SA/B1

4GA/B

MN4GA/B

4GA/B
(master)

MN3S0/
MN4S0

4TB

4L2-4/
LMFO

4KA/B

4F

PV5/
CMF

3MA/B0

3PA/B

P/M/B

NP/NAP/
NVP

4F**0E

HMV/
HSV

Uniwire
system

SKH

PCD/
FS/FD

4, 5 port pilot operated valve